



Technical Specification Sheet

European Oak - Rustic

Our Rustic Grade highlights the natural features present in European Oak. We allow for a culled presence of knots, cracks and checks, while attempting to remove presence of any significant sap. The allowance of up to 2" diameter knots, and open knots of up to 3/4" create a flooring grade that is both natural and sophisticated. Open voids are filled with a dark brown epoxy and presanded to 120 grit.



Overall Specification

Species:	Quercus Robur (European Oak)
Cut:	Rustic
Texture:	Smooth
Finish:	UV Finish
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched

Detailed Specification

Engineered

Thickness:	3/4" (6mm) or 5/8" (4mm wear layer)
Width:	5", 7", 8-5/8", 10-1/4"
Random Lengths:	2'-10' (50% @ 10' and 85% @ 6'-10') or Long Lengths 11'-13'
Edges:	Eased Edge 4 sides, Square Edge

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.


*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

European Oak - Prime Grade

Our Prime Grade highlights the tonal uniformity and clarity of an elevated grade of European oak. We allow for occasional pin knots and small filled knots up to 1/2". Efforts are made to cull sap, but some edge or end sap may be present. All planks are presanded to 120 grit.

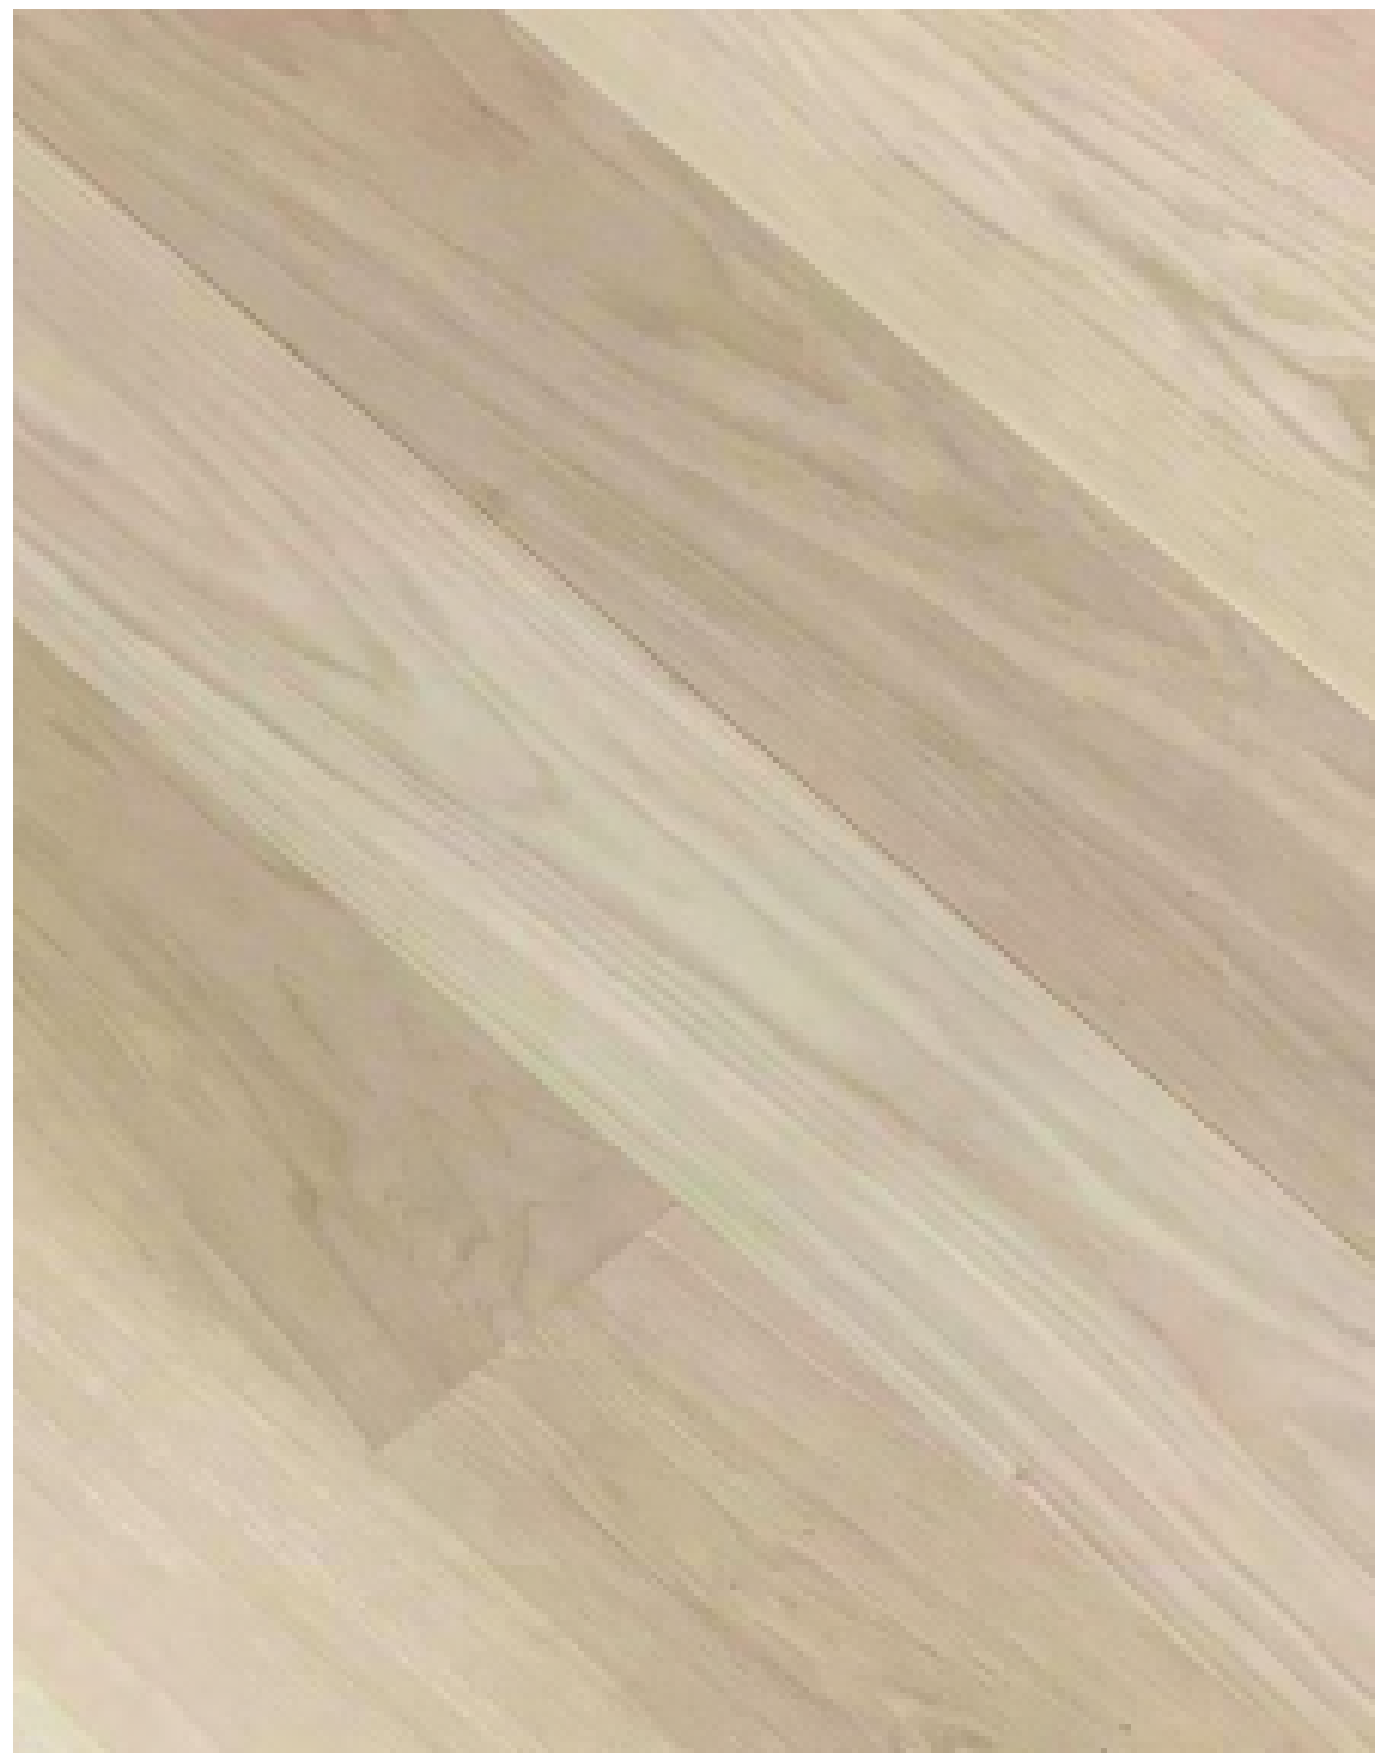

Overall Specification

Species:	Quercus Robur (European Oak)
Cut:	Prime
Texture:	Smooth
Finish:	UV Finish
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched

Detailed Specification

Engineered

Thickness:	3/4" (6mm wear layer) or 5/8" (4mm wear layer)
Width:	5", 7", 8-5/8", or 10-1/4"
Random Lengths:	2'-10' (50% @ 10' and 85% @ 6'-10') or Long Length 11'-13'
Edges:	Eased Edge 4 Sides or Square Edge

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.