



Technical Specification Sheet

Rack House Oak No.9

Rack House Oak was salvaged from a "rack house", from the renowned distillery of Wild Turkey Bourbon in KY. A rack house stores the charred barrels of bourbon during the aging process. This product is sourced from Rack House Oak No9, built in 1940. Our special Hit or Miss milling techniques leaves just enough saw kerf to maintain an overall rustic quality to this floor, while highlighting the original surface and exposing the historical patina that lies beneath oak that's earned it through exposure to time and the elements.



Overall Specification

Species:	Reclaimed Oaks (50% other mixed hardwoods)
Cut:	Mixed Grain
Texture:	Hit/Miss Distressed
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Mill:	Ship Lap Profile

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	3"-6"	3"-6"
Random Lengths:	2'-12'	2'-10'
Edges:	Square or Microbevel	Square or Microbevel

**Inherent characteristics in reclaimed wood are not considered defects

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.


*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Oak - Hit/Miss

Antique Oak Hit/Miss retains the original saw kerf and natural patina through a custom milling process known as hit and miss. This process adds to the unique characteristics of each plank making it a one of a kind floor.

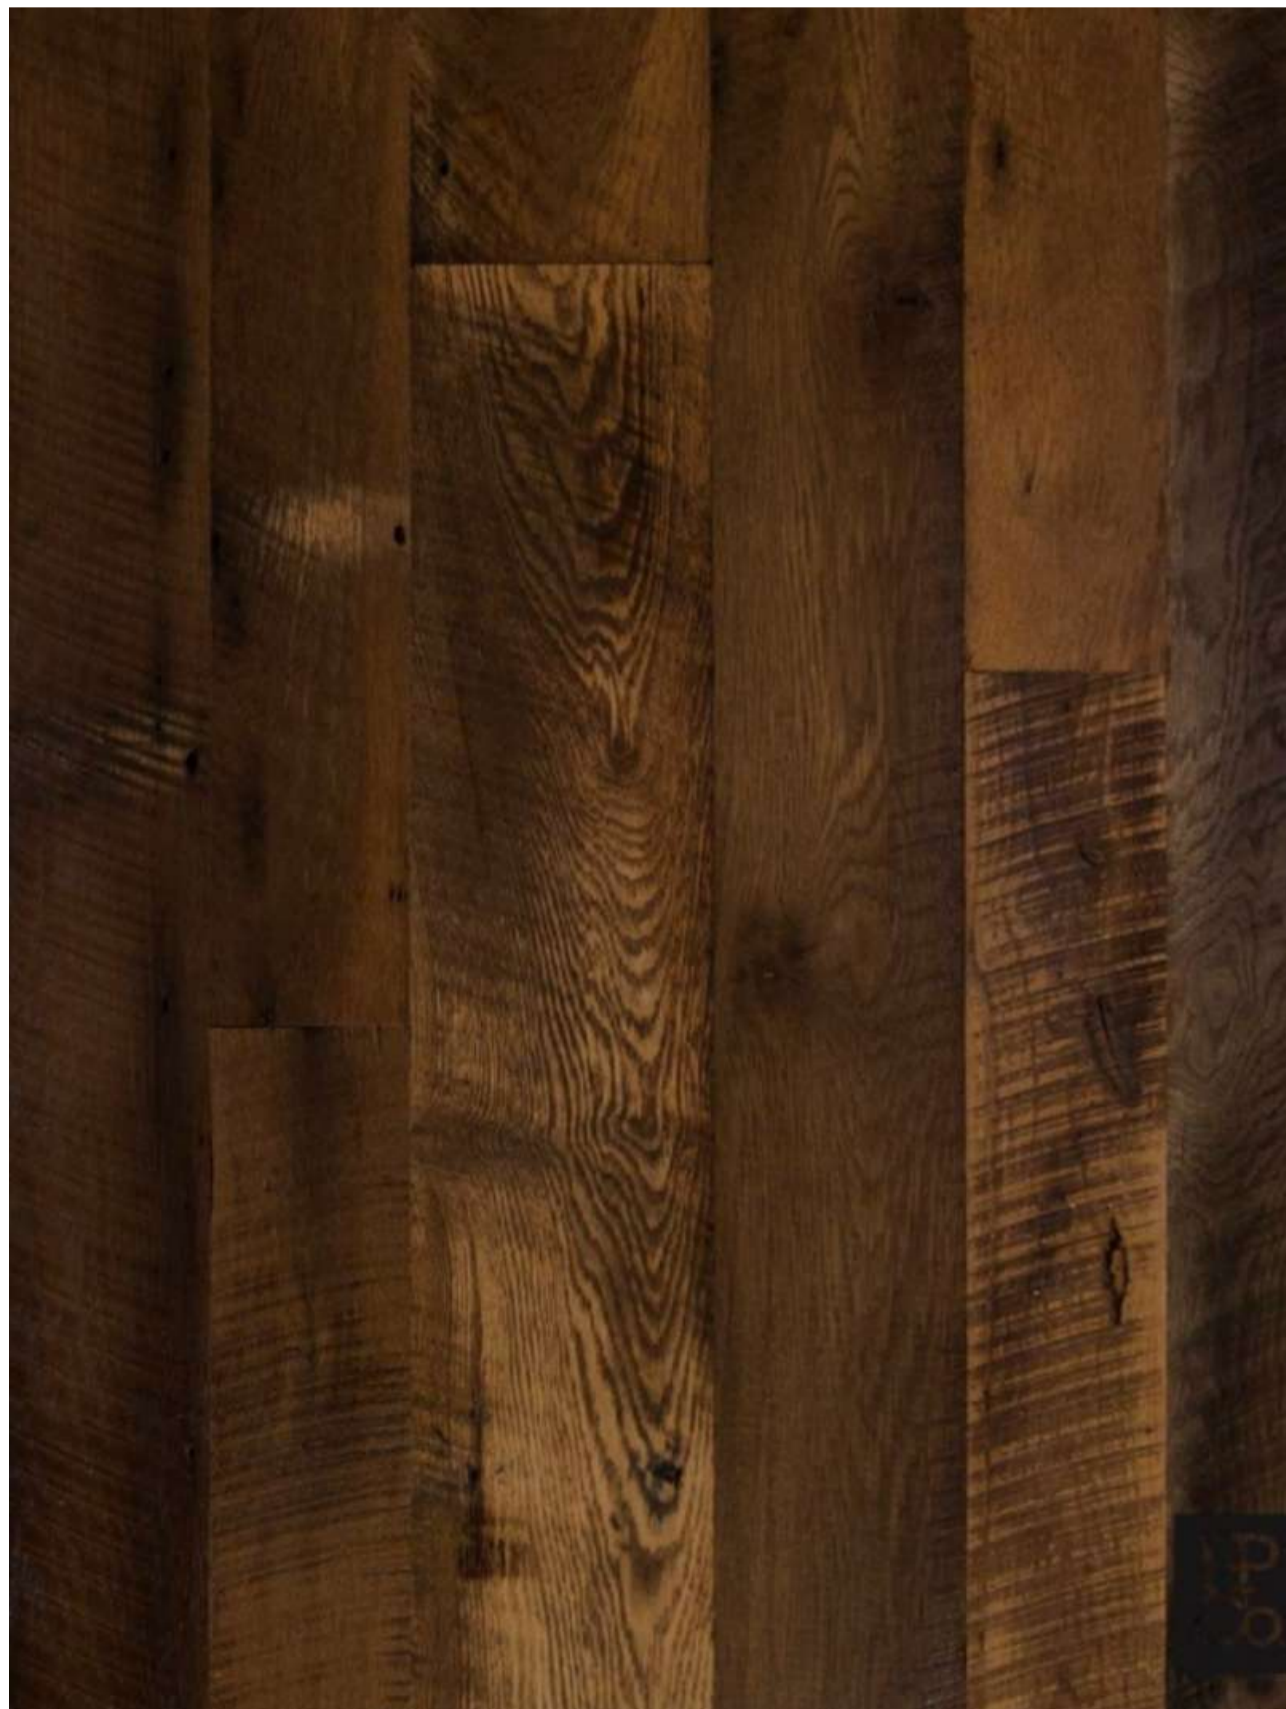

Overall Specification

Species:	Reclaimed Hit- Miss Mixed Red & White Oak
Cut:	Mixed Grain
Texture:	Original Distressed
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Mill:	Ship Lap Profile

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	2.5"-12"	3"-10"
Random Lengths:	2'-12'	2'-10'
Edges:	Square or Microbevel	Square or Microbevel

**Inherent characteristics in reclaimed wood are not considered defects

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Oak - Original Face

We mill this oak flooring only on the edges and at the bottom, leaving the original top, or "face" of the reclaimed wood exposed, before carefully selecting a set of boards with the appearance of age and patina and milling for each project.



Overall Specification

Species:	Reclaimed Original Distressed Mixed Red & White Oak
Cut:	Mixed Grain
Texture:	Original Distressed
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Mill:	Ship Lap Profile

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	2.5"-12"	3"-10"
Random Lengths:	2'-12'	2'-10'
Edges:	Square or Microbevel	Square or Microbevel

**Inherent characteristics in reclaimed wood are not considered defects

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.


*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Pine - Hit/Miss, Tobacco Wood

Tobacco barns were once a common site on farms throughout Virginia and The Carolinas. Used to cure the tobacco produced on the farms, the wooden material would take on a leathered look over time from housing the curing process. In milling this floor, we have taken great care to preserve than natural patina, saw kerf marks, and the other characteristics that make this floor unique—a unique mixture of browns and reds, along with occasional nail holes and a history that becomes the centerpiece of any home.

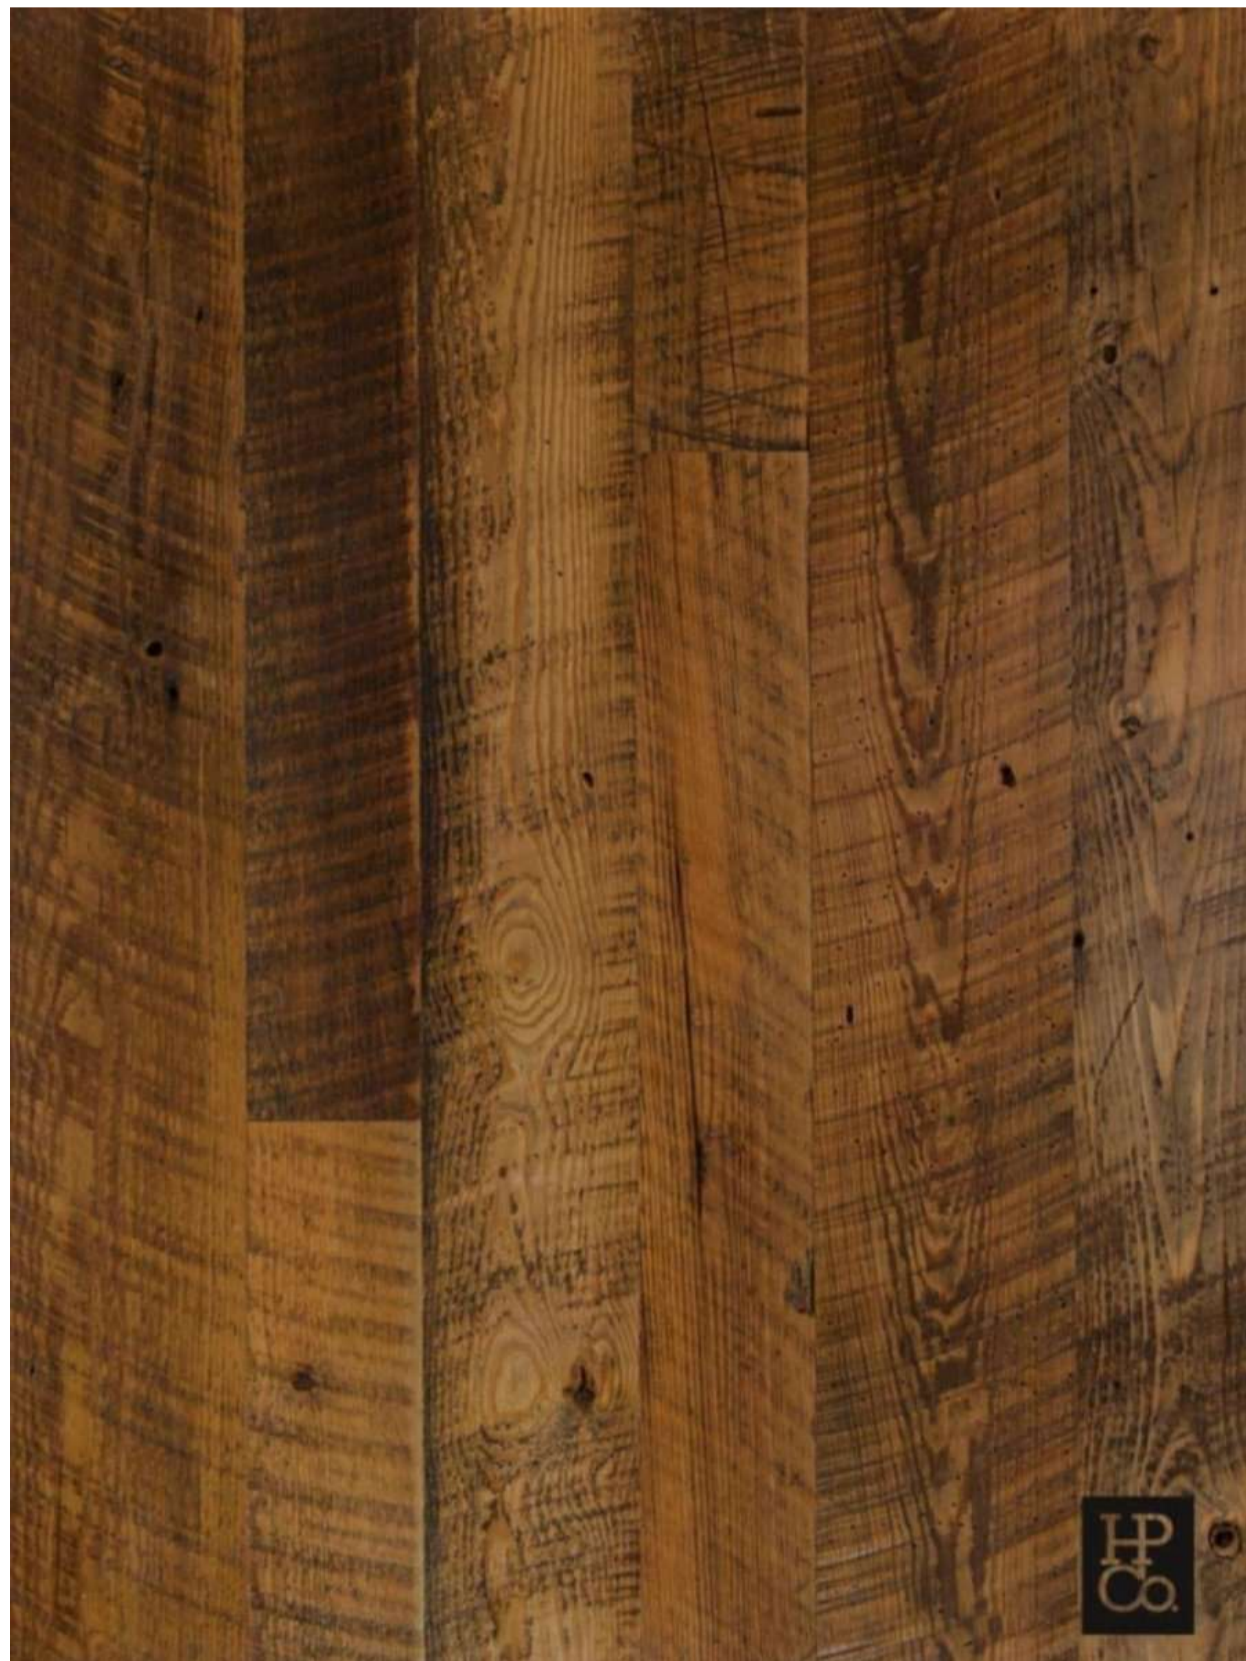

Overall Specification

Species:	Antique Hit-Miss Tobaccowood
Cut:	Textured Face
Texture:	Distressed
Janka Hardness:	1,225
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Mill:	Ship Lap Profile

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	2.5"-12"	2.5"-12"
Random Lengths:	2'-12'	2'-10'
Edges:	Square or Microbevel	Square or Microbevel

**Inherent characteristics in reclaimed wood are not considered defects

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.


*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Heart Pine - Hit/Miss

Antique Heart Pine - Hit/Miss combines the gorgeous character of heart wood with our custom milling hit/miss process, to give a gorgeous texture to the face. Under the texture shines the beautiful depth of color in Heart Pine.

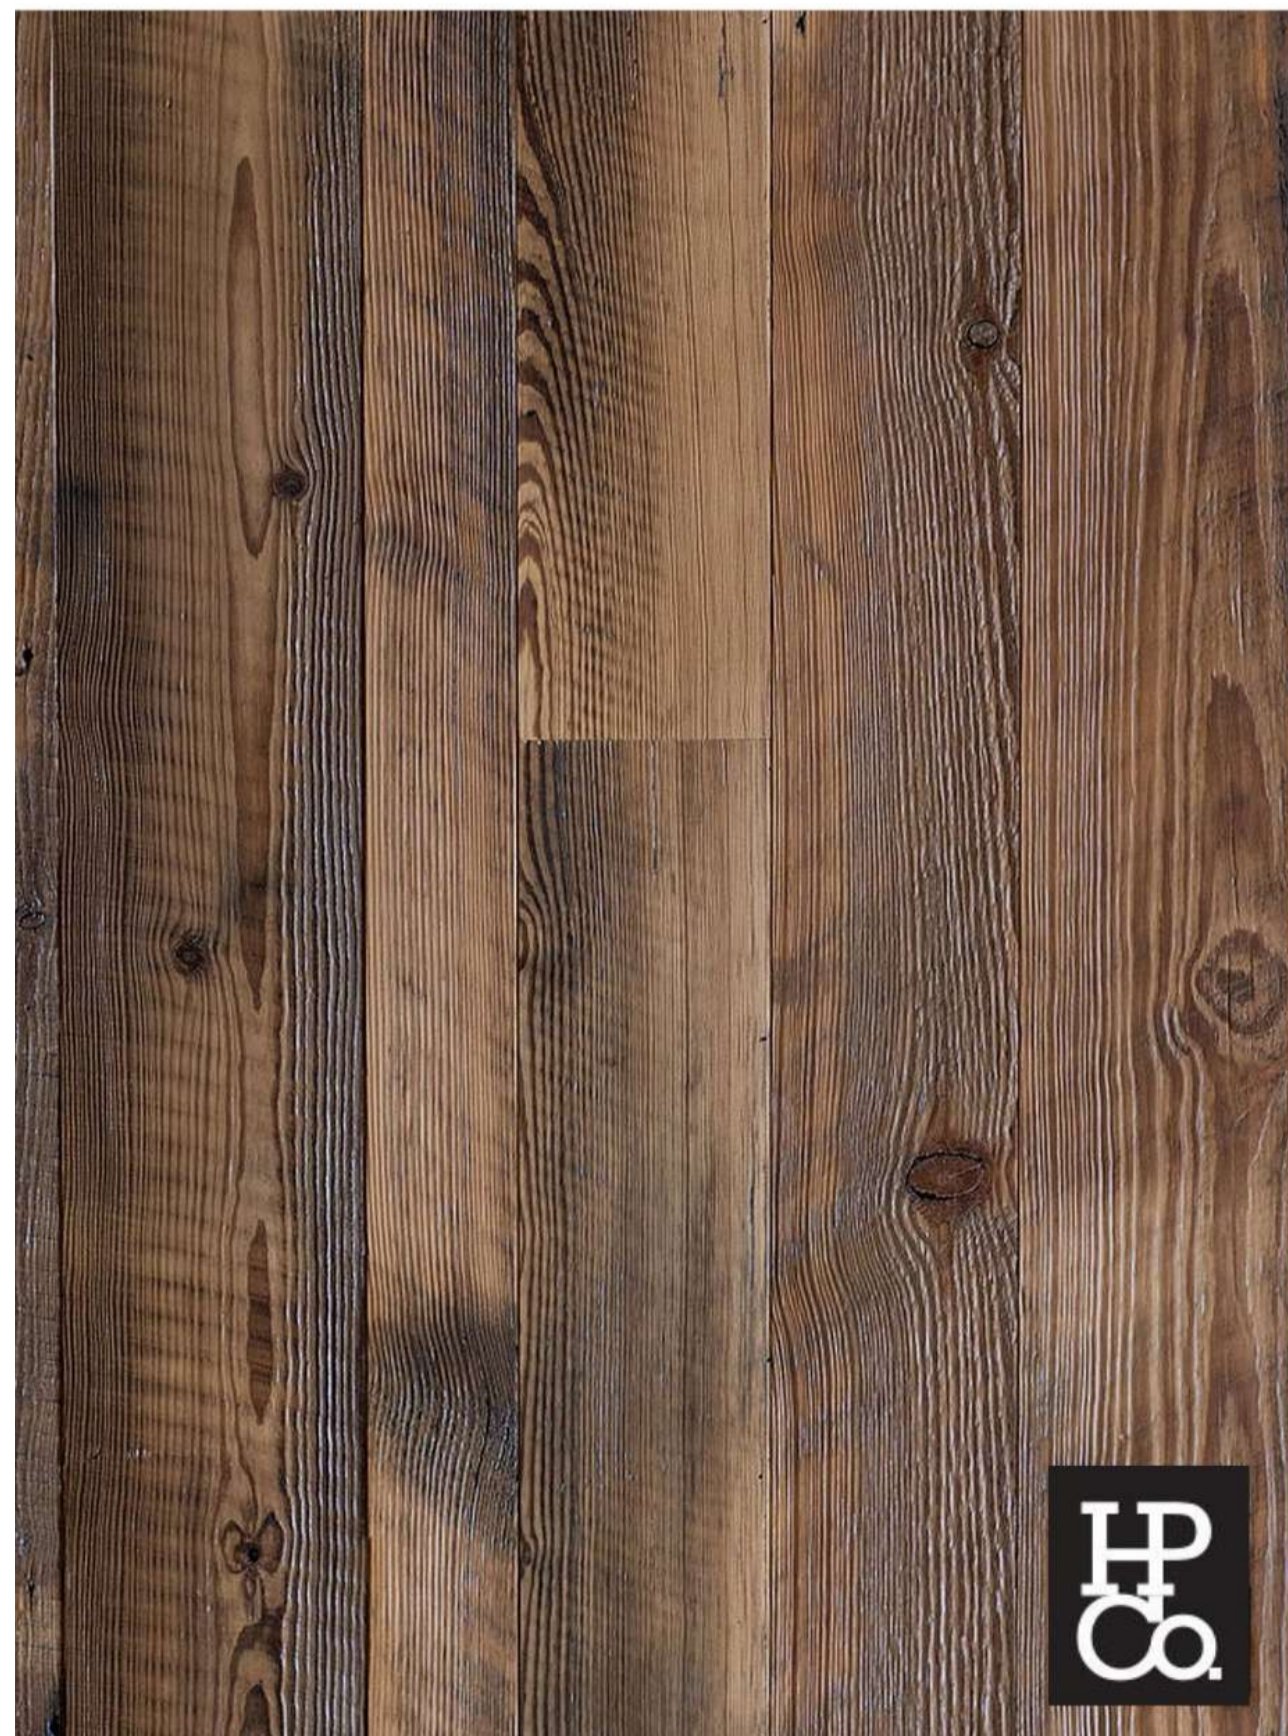

Overall Specification

Species:	Antique Heart Pine - Hit/Miss
Cut:	Textured Face
Texture:	Distressed
Janka Hardness:	1,225
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Mill:	Ship Lap Profile

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	2.5"-12"	2.5"-12"
Random Lengths:	2'-12'	2'-10'
Edges:	Square or Microbevel	Square or Microbevel

**Inherent characteristics in reclaimed wood are not considered defects

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.