




Technical Specification Sheet

Horse Country Oak - Remilled

Horse Country Oak is reclaimed from horse fencing. The natural patina is enhanced by time in the weather and elements, creating a face rich with time worn patina.

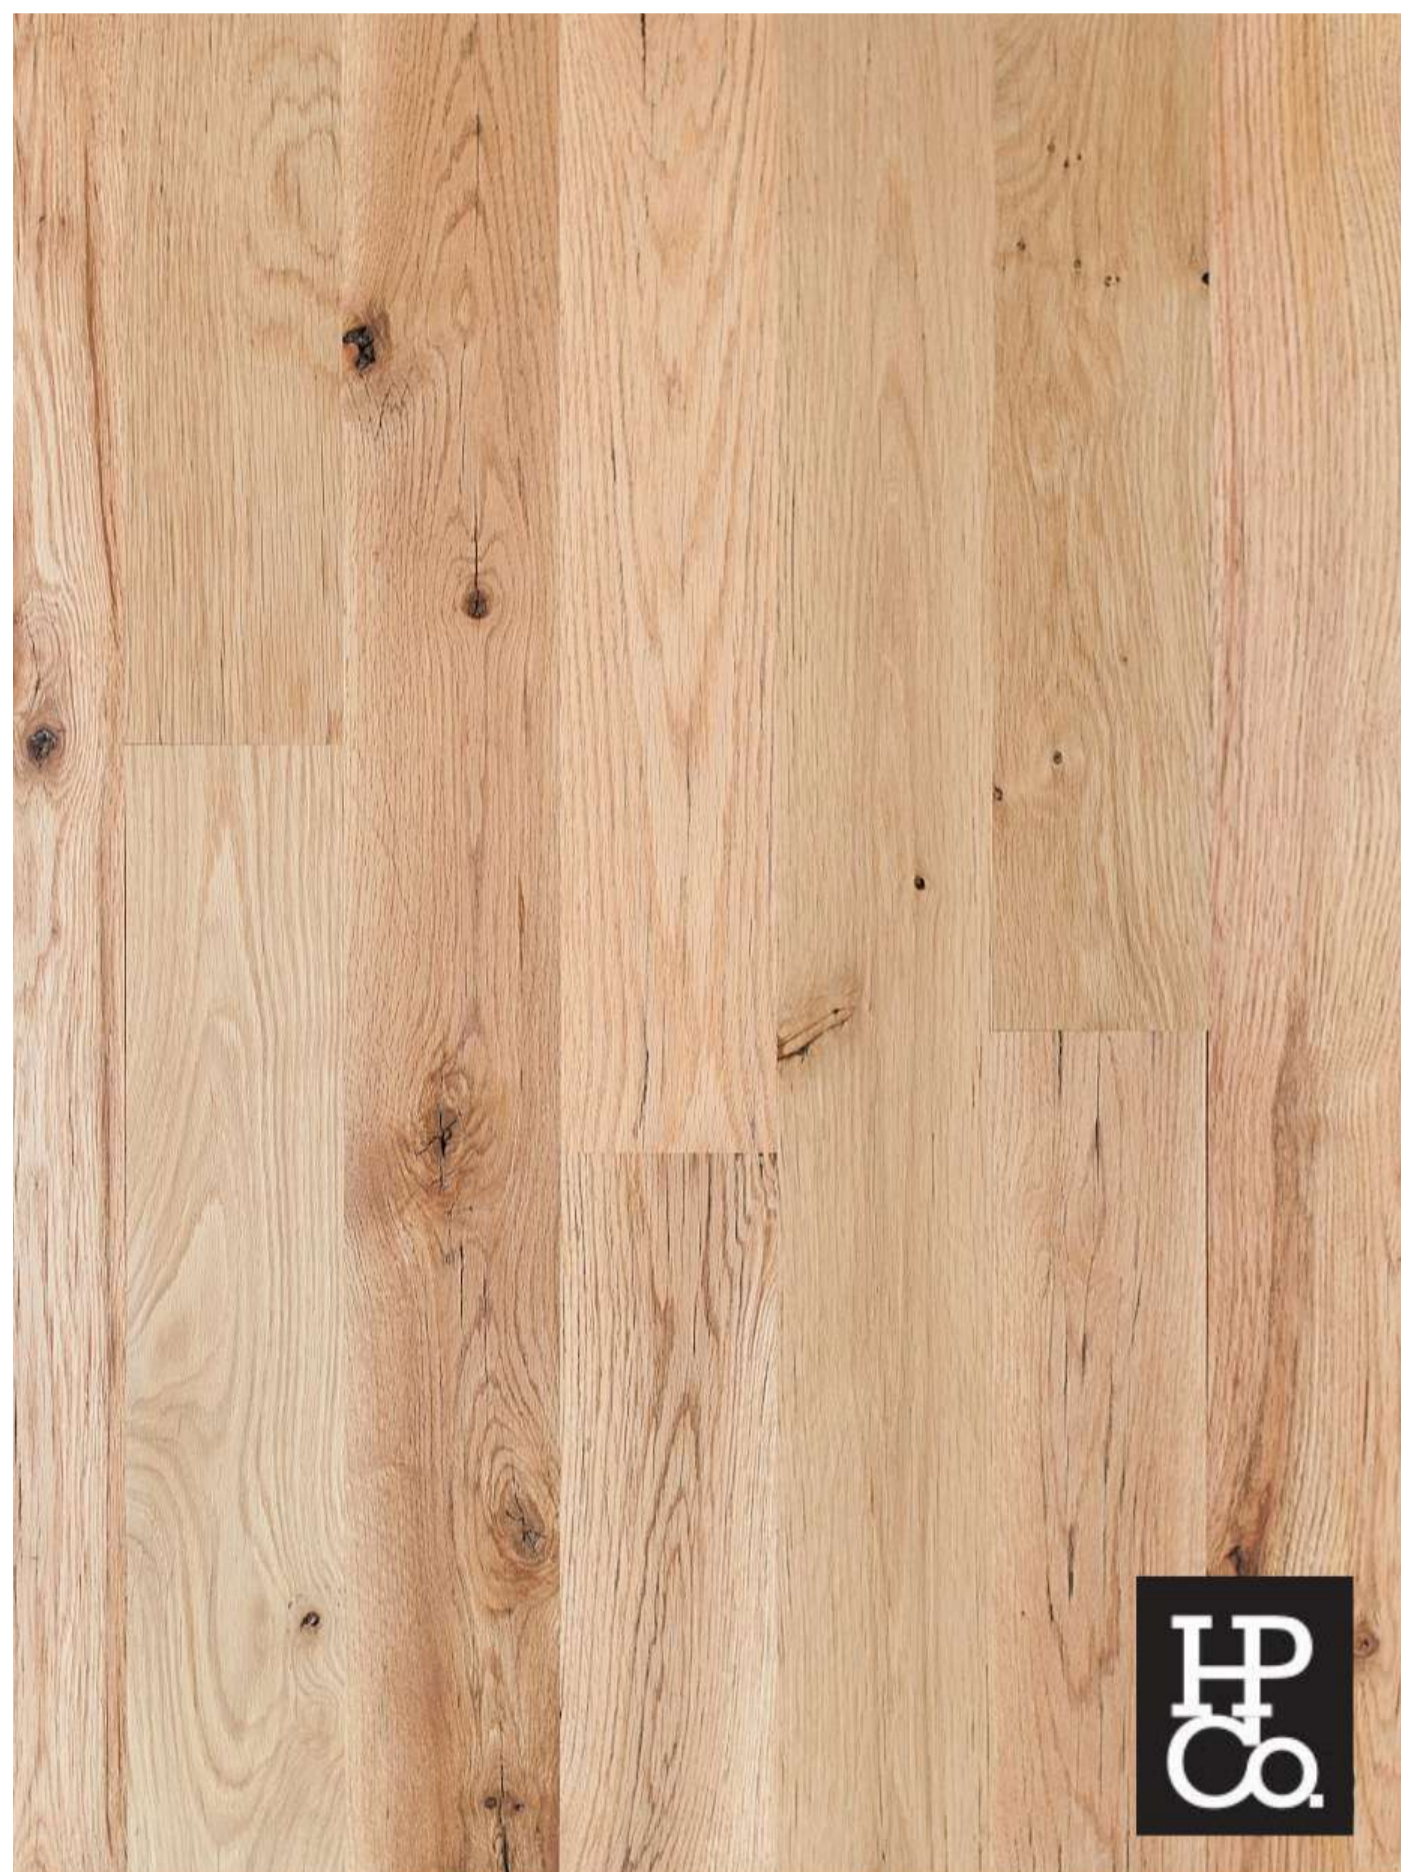

Overall Specification

Species:	Horse Country Oak
Cut:	Mixed Grain
Texture:	Smooth
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Millwork:	Ship Lap
Original Texture:	Remilled

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	3"-4.5"	3" - 4.5"
Random Lengths:	2'-7'	2'-7'
Edges:	MB or Square	MB or Square

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.


*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Oak - Remilled

Antique oak flooring is manufactured from material that was once used in barns and other old buildings located throughout the Shenandoah Valley and the Appalachian Mountains of Virginia. This beautiful reclaimed flooring is a mix of red and white oaks with wonderful colors ranging from golden browns to light reds. With random small nail and worm holes, along with occasional stress cracks,

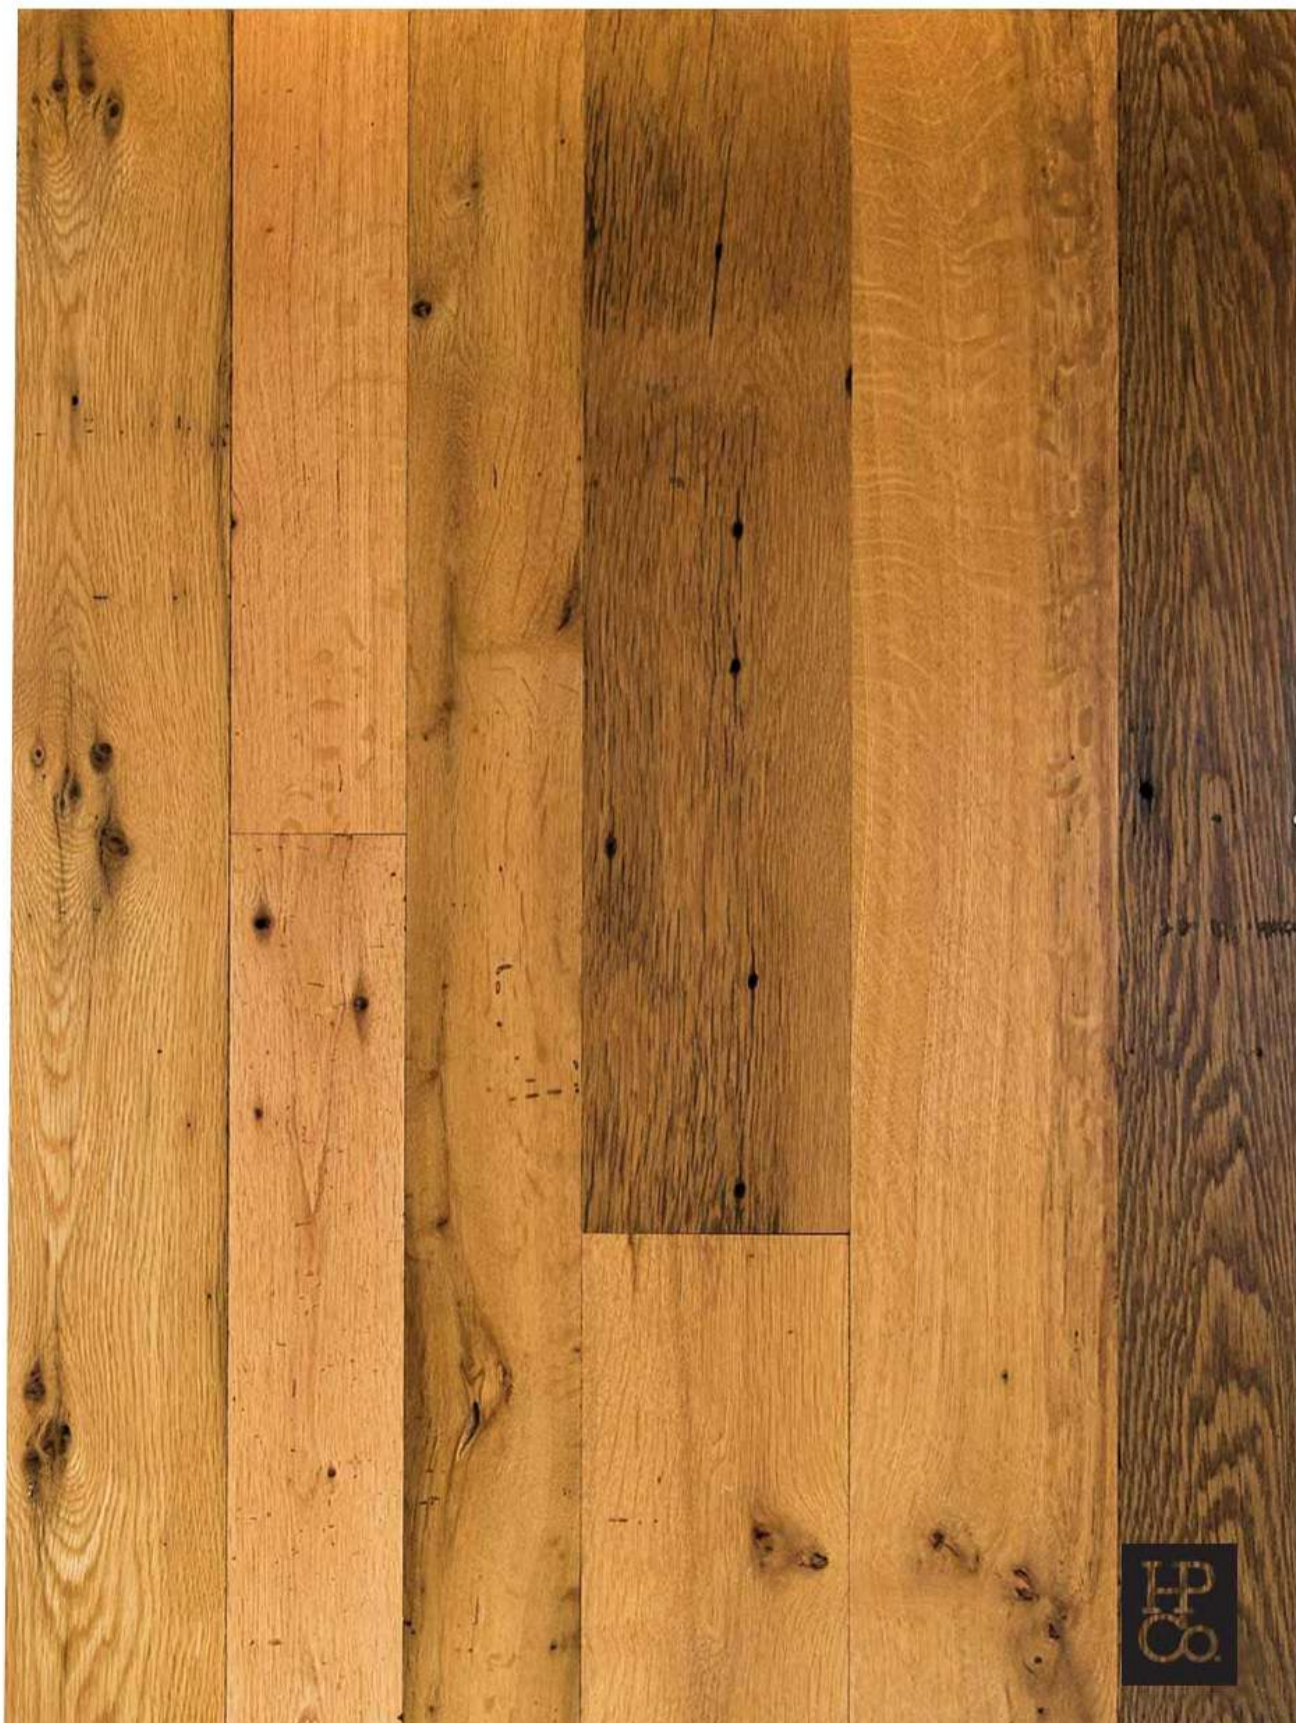

Overall Specification

Species:	Reclaimed Mixed Red & White Oak
Cut:	Mixed Grain
Texture:	Smooth
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Millwork:	Ship Lap
Original Texture:	Remilled

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	3"-10"	3" - 10"
Random Lengths:	2'-12'	2'-10'
Edges:	MB or Square	MB or Square

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Chestnut - Remilled

Antique Chestnut comes from salvaged barns and buildings. Chestnut trees started to be devastated by blight in the early 1900's, Due to the blight, the availability of Chestnut is limited to reclamation. Its gorgeous color tones and rustic beauty makes it one of the most sought after woods.



Overall Specification

Species:	Chestnut
Cut:	Mixed Grain
Texture:	Smooth
Janka Hardness:	540
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Millwork:	Ship Lap
Original Texture:	Remilled

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	3"-10"	3" - 10"
Random Lengths:	2'-12'	2'-10'
Edges:	MB or Square	MB or Square

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.



Technical Specification Sheet

Antique Hickory - Remilled

Reclaimed Hickory is comprised of contrasting light and dark wood tones from a variation in sapwood and heartwood. The bold grain patterns give Antique Hickory a truly unique look. Hickory is one of the hardest domestic flooring choices, it is the perfect choice for any space. We also have the ability to custom finish to help even out the varying tones in Hickory.



Overall Specification

Species:	Hickory
Cut:	Mixed Grain
Texture:	Smooth
Janka Hardness:	1,820
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Millwork:	Ship Lap
Original Texture:	Remilled

Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8"
Width:	3"-10"	3" - 10"
Random Lengths:	2'-12'	2'-10'
Edges:	MB or Square	MB or Square

*Janka Rating: is provided from similar tested products

*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.