



# Technical Specification Sheet

## Live Sawn White Oak

Using an historic and very simple sawing method, we provide our domestic alternative to “French Cut” oak. This is a non-graded lumber with a mixed yield of high and low grade boards. The consistent grain pattern and visual characteristics that parallel a rift & quartered floor are available at a cost close to rustic grade making this a popular product and a unique value.



### Overall Specification

Species:	White Oak
Cut:	LiveSawn
Texture:	Smooth
Finish:	Waterbased, Oil, UV
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Millwork:	Shiplap
Optional Texture:	Hit/Miss Face

### Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8" (4mm wear layer)
Width:	3" -12" available	3" - 12" available
Random Lengths:	2'-12'	2'-10'
Edges:	MB or Square	MB or Square

\*Janka Rating: is provided from similar tested products

\*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

\*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.






# Technical Specification Sheet

## Live Sawn White Oak - Hit/Miss

Using an historic and very simple sawing method, we provide our domestic alternative to “French Cut” oak. This is a non-graded lumber with a mixed yield of high and low grade boards. The consistent grain pattern and visual characteristics that parallel a rift & quartered floor are available at a cost close to rustic grade making this a popular product and a unique value. Added Hit/Miss Saw Mark texture gives this floor a unique rustic feel.

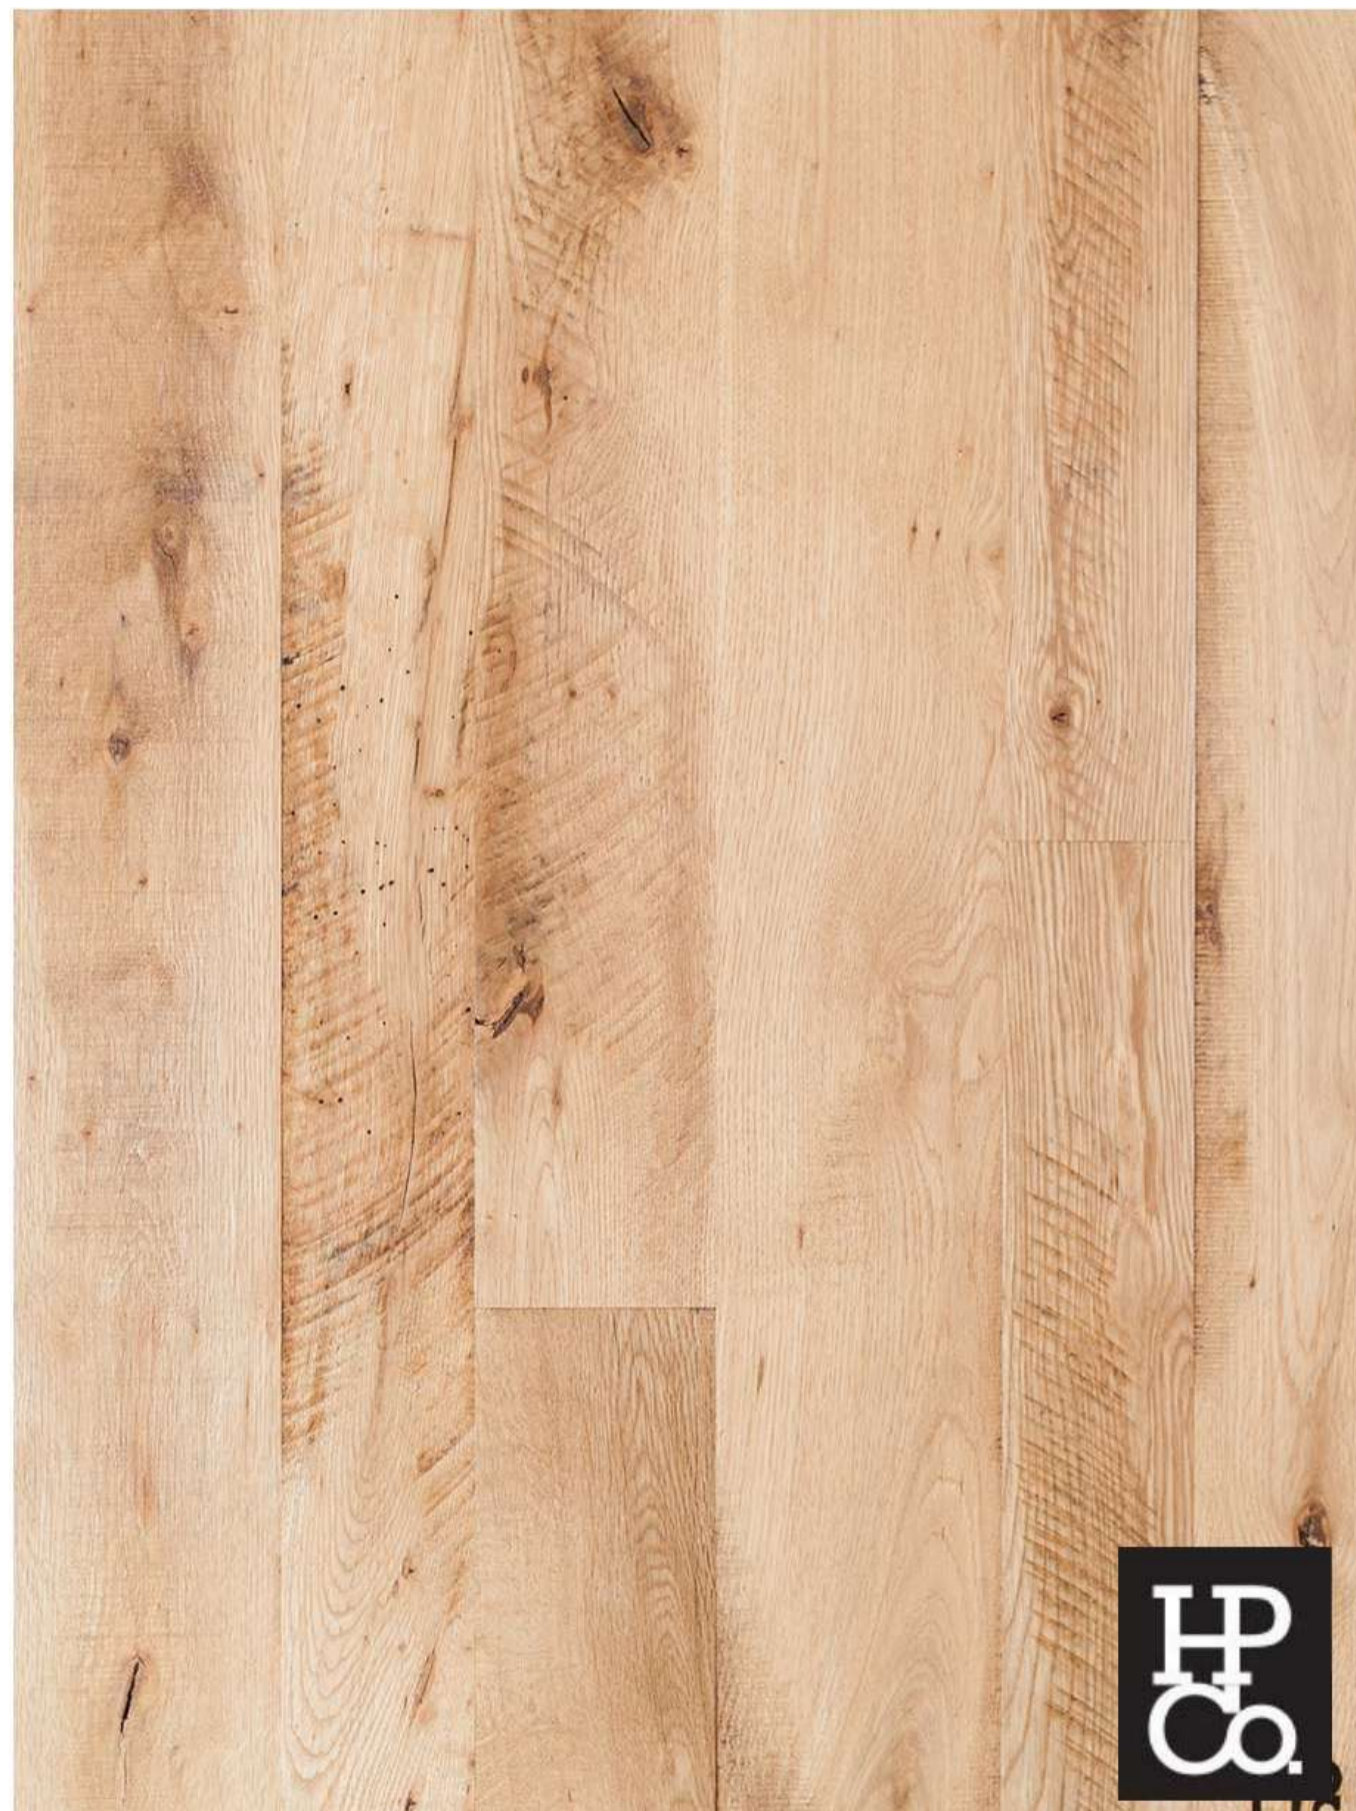

### Overall Specification

Species:	White Oak
Cut:	LiveSawn
Texture:	Hit/Miss
Finish:	Waterbased, Oil, UV
Janka Hardness:	1,360
Flame Spread Class Rating:	Class III (Class C)
Standard Millwork:	Tongue & Groove, End matched
Optional Millwork:	Shiplap
Optional Texture:	Smooth

### Detailed Specification

	Solid	Engineered
Thickness:	3/4"	3/4" or 5/8" (4mm wear layer)
Width:	3" -12" available	3" - 12" available
Random Lengths:	2'-12'	2'-10'
Edges:	MB or Square	MB or Square

\*Janka Rating: is provided from similar tested products

\*Flame Spread Class Rating, Flame Spread Index Data and Smoke Developed Index based on report from American Wood Council - 2017. HPCo. Products have not been tested but are expected to be close to actual measurements on comparable wood species.

\*We can Fire Tread to Class A for Interior Applications for additional upcharge, contact for details.